
## DUAL SIDE DOOR WORK PLATFORM- WP-4848-DD APPROX WEIGHT: 245.40 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PAKE \*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

APPROX WEIGHT: 245.40 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

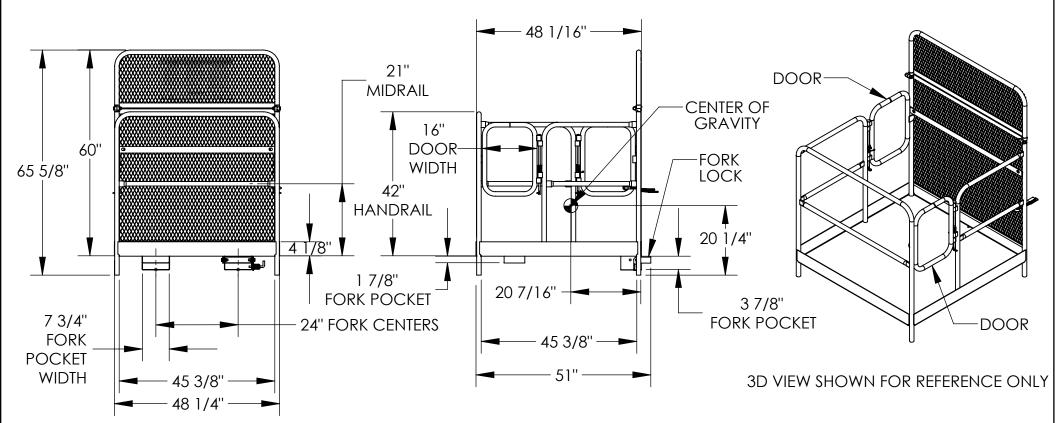

## STANDARD FEATURES

## SPECIAL FEATURES

DIMENSION TOLERANCE ± 1/4"

MODEL NUMBER IS WP-4848-DD CAPACITY IS 1,000 LBS. (EVENLY DISTRIBUTED LOAD) **OVERALL WIDTH IS 48 1/4" USABLE WIDTH IS 45 3/8" OVERALL LENGTH IS 51"** USABLE LENGTH IS 45 3/8" 42"HIGH HANDRAIL WITH 21" MIDRAIL AND 4 1/8" TOEBOARD (2) SELF-CLOSING DOORS SWING IN ONLY (WILL NOT OPEN OUT) FORK LOCK IS ROTATED UP BEHIND BACK OF FORK AND LOCKED WITH SPRING LOADED PLUNGER 36" LONG STRAP WITH HOOK (NOT SHOWN) MUST ATTACH PLATFORM TO FORK TRUCK 60" HIGH EXPANDED MESH BACKING

USABLE FORK POCKET HEIGHTS: 3 7/8" REAR, 1 7/8" FRONT

**USABLE FORK POCKET WIDTH: 7 3/4"** 

MANUFACTURED TO MEET OUR INTERPRETATION OF OSHA STANDARDS TOUGH BAKED IN POWDER COATED ERGO BLUE FINISH

**NEVER EXCEED LOAD CENTER RATING** PER FORK TRUCK MANUFACTURER'S GUIDLINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

## ANY MODIFIED UNITS ARE NON-RETURNABLE

[ ] As drawn [ ] As marked Signed:

**Printed Name:** 

P

Ρ

R

0

V

		LEAD	TIME WILL START UP	UN RECEIF	OF SIGNED	APPROVAL DRAWIN
FOR INTERNAL USE ONLY PROJECT SIGN OFF						P.O.# X
SALES		1 LOTTE 1417 (1 4017 (C101(1140			W.O.# X	
ENG.		DRAWN BY: (	C.WOLF	DATE: 08/		SALES: X
FAB.		REFERENCE: )	ζ		SCALE: 1:28	
POWER		QUOTED LEAD	TIME: X	QUOTE #		14-007-076